



800 Series II Single Screw Vertical Mixer

Specifications

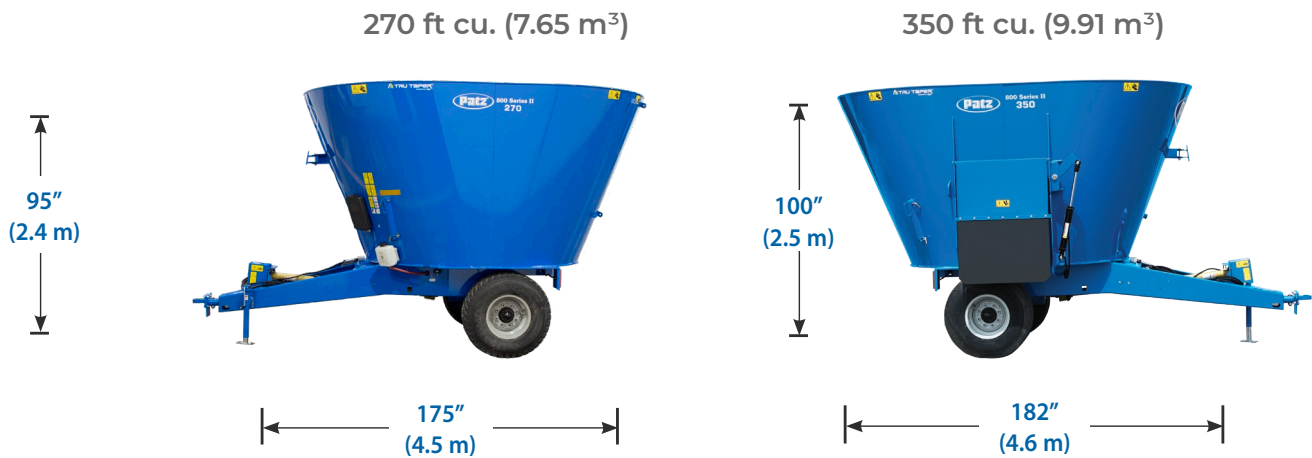

800 Series II  Tru Taper®	U/M	270	350
Mixing Capacity w/ Extensions (9.25 in)	ft ³ /m ³	315 (9)	400 (11)
Weight	lbs (kg)	5,370 (2,435.8)	5,750 (2,608)
Max Load @ 25 lb/ft ³	lbs (kg)	6,750 (3,062)	8,750 (3,969)
Max Gross Weight	lbs (kg)	12,120 (5,498)	14,500 (6,577)
Floor Thickness	in (mm)	1/2 (13)	
Sidewall Thickness	in (mm)	1/4 (6)	
Door Opening Height x Width (Rear)	in (mm)	30 (762) x 39 (991)	
Door Opening Height x Width (Side - 2 Locations)	in (mm)	39 (991) x 34 (864)	39 (991) x 34 (864)
Screw Flighting Thickness	in (mm)	1/2 (13)	
Screw Height x Diameter	in (mm)	34 (864)/ 44 (1,118) x 86 (2,184)	
Knife Positions		5	7
Operating Speed	RPM	540	
Drive Package		1-3/8" - 6 Spline Direct Drive	
Minimum PTO HP (Continuous Run)	HP	55	65
Trailer Type		Unibody	
Scale System		3-Point	
Tires		(2) 320/70 R 15 Tubeless (Rib or Turf)	

OPTIONS

Vertical Mixer Knives

- Serrated
- Raptor

Side Extensions

- Rubber

Hay Retainer

- Discharge Chute w/ or w/o Magnet
- Discharge Conveyor
- Tub Mounted Magnet

Selection of Indicators

- Digi-Star®,
- dinamica generale®
- Weigh-Tronix®

Camera Package

- Ladder (Rear Location)
- Planetary Cooling System
- Hydraulic Control Center



CAUTION: Never operate Patz equipment without all shields and guards in place. **Safety Is No Accident.** Before operating any piece of equipment, be sure to read and understand the operator's manual. This manual should be kept with the machine at all times. Additionally, make sure all safety shields and devices are functioning properly and are securely in place. Specifications and prices subject to change without notice.