


# 800 Series II Single Screw Vertical Mixer Specifications

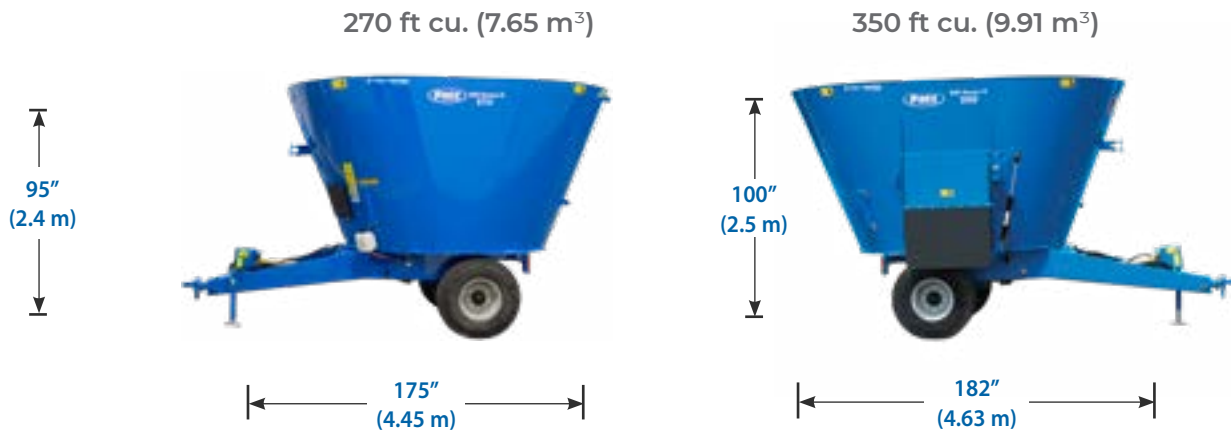

800 Series II Tru Taper™	U/M	270	350
Mixing Capacity w/ Extensions (+9¼in.)	ft³/m³	315 (9)	400 (11)
Weight	lbs (kg)	5,370 (2435.8)	5,750 (2608)
Max Load @ 25#/Ft.³	lbs (kg)	6,750 (3062)	8,750 (3969)
Max Gross Weight	lbs (kg)	12,120 (5,498)	14,500 (6577)
Floor Thickness	in (mm)	1/2 (13)	
Sidewall Thickness	in (mm)	1/4 (6)	
Door Opening Height x Width (Rear)	in (mm)	30 (792) x 39 (991)	
Door Opening Height x Width (Side - 2 Locations)	in (mm)	39 (991) x 34 (864)	39 (991) x 34 (864)
Viewing Platform		--	
Screw Flighting Thickness	in (mm)	1/2 (13)	
Screw Height x Diameter	in (mm)	34 (864)/ 44 (1118) x 86 (2184)	
Knife Positions		5	7
Operating Speed	RPM	540	
Drive Package		1-3/8" - 6 Spline Direct Drive	
Minimum PTO HP (Continuous Run)	HP	55	65
Trailer Type		Unibody	
Scale System		3-Point	
Tires		(2) 320/70 R 15 Tubeless (Rib or Turf)	

## OPTIONS

Vertical Mixer Knives  
 - Serrated  
 - Raptor  
 Side Extensions  
 - Rubber

Hay Retainer  
 Discharge Chute w/ or w/o Magnet  
 Discharge Conveyor  
 Tub Mounted Magnet

Selection of Indicators  
 - Digi-Star®,  
 - dinamica generale®  
 - Weigh-Tronix®

Camera Package  
 Ladder (Rear Location)  
 Planetary Cooling System  
 Hydraulic Control Center



**CAUTION:** Never operate Patz equipment without all shields and guards in place. **Safety Is No Accident.** Before operating any piece of equipment, be sure to read and understand the operator's manual. This manual should be kept with the machine at all times. Additionally, make sure all safety shields and devices are functioning properly and are securely in place. Specifications and prices subject to change without notice.