



# 9427 CHOPPER



## CHOP IT! MULCH IT!

- ✓ Patented unique, one-piece, four-point, double-edge rotor blade is designed for chopping and long life.
- ✓ The  $\frac{3}{16}$  inch (4.7 mm) thick, through-hardened steel blades are beveled and serrated for effective cutting action and provide plenty of strength for tough cutting conditions.
- ✓ No bolts, rivets, or welds on the blade, so snagging or wrapping of material is greatly reduced.
- ✓ Enjoy trouble-free performance from this rotor blade, whether chopping newspaper, hay, straw, or other materials.

# 9427 CHOPPER Standard Features

## THE PATZ CHOPPER USES LESS STRAW AND COVERS MORE AREA IN LESS TIME!

*No matter where you use it, the 9427 Chopper will save you time and labor!  
No more shaking straw by hand for cow bedding!*



### Uniform coverage

Provides a professional appearance for your finished project!

### Reverse or replace blades quickly and easily

Simply lift the deck and disassemble the rotor shaft. The belts can be easily removed from the rotor shaft pulley. Also, there are no knives to unbolt or bolt together.

### The rotor assembly

Has 20 rotor blades in a spiral mounting to provide fast, efficient cutting. Large 5 inch (127 mm) diameter, die-cast aluminum spacers reduce wrapping. The 1 1/2 inch (38 mm) diameter hex shaft is strong to handle the torque. The rotor speed of 2,850 RPM cuts at a high-volume rate. There is a double-belt drive to the rotor.

### Quadra-Shark®

The blade sets a higher standard in chopper performance.

### Also available

Stationary with bottom discharge - shown with optional electric motor.



### The deck

Is hinged for convenient inspection of the rotor.

### A single-handle, seven-position grate control

Allows varying length of cut and adjusts material flow rate. Two-bolt flange rotor shaft bearings are mounted outside the chopper frame to minimize contamination and allow easy lubricating and servicing (guard removed for viewing).



### An adjustable grate is standard equipment

The grate and rotor are designed for short chopping of straw, hay, bark, plastics, and many more materials. Each 1/4 inch (6 mm) thick grate finger is welded at both ends to the two full-length grate shafts for rigidity.

### The polyethylene deck top

Eliminates metal-to-metal contact and provides easy tub rotation. Also, the polyethylene deck top along with the polyethylene tub skirt form a tight seal to help prevent leakage of paper and other materials. Grippers hold the bale as the steel tub rotates.



### Two adjustable discharge doors

Direct the flow of materials.



### Convenient controls

All controls are grouped together for convenient and easy operation. Labels indicate clearly what each lever controls and direction to move it.


### Control levers vary on each model

- Parking brake
- Rotor engagement
- Grate height adjustment
- Tub rotation engagement



### Fire extinguisher

Class ABC rated is standard on all Model 9427 Choppers.

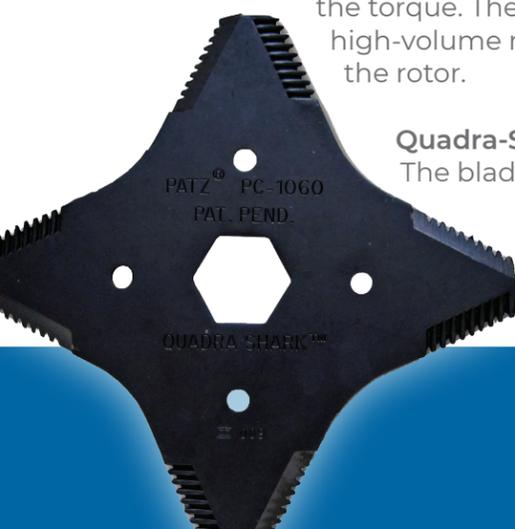

· LONG LASTING, REVERSIBLE BLADES ·

· SAVE MATERIALS, TIME, AND LABOR ·

# 9427 CHOPPER Specifications

## CHOOSE THE CHOPPER THAT'S RIGHT FOR YOUR OPERATION!



9427 CHOPPER	PORTABLE	STATIONARY
Gasoline Engine	Honda 13 HP, 1 Cyl, Recoil or Electric Start	-
Electric Motor	3 HP, Single Phase	3 HP, Single Phase / 5 HP / 10 HP
Rotors - Quadra-Shark® Blades	20 Blades, 80 Knives / 2850 RPM	
Grate	7 Position Adjustable / 19 Standard Cut, Grate Fingers	
Frame	Flip Up Deck / Adjustable Side Discharge Doors	Flip Up Deck / Bottom Discharge
Control Levers	Parking Brake, Rotor Engagement, Grate Height Adjustment, Tub Engagement	Grate Height Adjustment, Tub Engagement
Front Tires	(2) 8 in Rib w/ Inner Tube	-
Rear Tires	4 in w/ Inner Tube	-
Fire Extinguisher	5 lb Class ABC Rated	
Options	Additional Swivel Wheel, Hour Meter	Hour Meter, Adjustable Screen



**CAUTION:** Never operate Patz equipment without all shields and guards in place. *Safety Is No Accident.* Before operating any piece of equipment, be sure to read and understand the operator's manual. This manual should be kept with the machine at all times. Additionally, make sure all safety shields and devices are functioning properly and are securely in place.



For some photos in this brochure, guards were removed for photographic purposes only to allow viewing of the equipment features. Before operating equipment, all guards must be in place. Because Patz continually improves and updates products, Patz reserves the right to change the construction of machines or attachments or any part thereof without incurring any obligation to make like changes on Patz machines, or attachments previously delivered. Specifications and prices subject to change without notice.